

KEYLESS1

THE PERFECT LOCK

✓ SIMPLE ✓ SUSTAINABLE ✓ SECURE

SIMPLY PERFECT. PERFECTLY SIMPLE.

Sleek and modern combination locks for shared or assigned use in any wet or dry environment.

With no batteries to change, no plastic parts and no wires, our locks are maintenance-free resulting in zero operating expenses and two LEED V4 credits.

Standard, premium and custom finishes as well as ADA versions backed by personal service and the best 5-year comprehensive warranty.



OUR CLIENTS



Mercedes-Benz



KEYLESS1

ARCHITECTURAL SPECIFICATIONS



PART NUMBER:
KEYLESS1-SN
KEYLESS1-SN-ADA

STANDARD FINISH:
Satin Nickel

FINISHING PROCESS:
Electroplating



PART NUMBER:
KEYLESS1-MB
KEYLESS1-MB-ADA

PREMIUM FINISH:
Matte Black/Munsell N2

FINISHING PROCESS:
Electrodeposition coating



PART NUMBER:
KEYLESS1-MW
KEYLESS1-MW-ADA

PREMIUM FINISH:
Matte White/Munsell N9

FINISHING PROCESS:
Epoxy painting



PART NUMBER:
KEYLESS1-SG
KEYLESS1-SG-ADA

PREMIUM FINISH:
Satin Gold Pantone #871C

FINISHING PROCESS:
Epoxy painting


10% color discrepancy, and custom pricing options apply.

- 10,000 possible 4-digit combinations
- Compatible with wood, glass, plastic, phenolic & metal locker doors
- One Master Key has 3 functions: bypasses the code, resets the lock, and retrieves the code - all conveniently from the front
- Lock features reprogrammable-cylinder: When Master Key is lost or stolen, new Master Key is issued. Simply insert new Master Key and cylinder is reprogrammed - patented solution
- Anti-pick and tamper resistant
- Self-correcting, Breakaway Knob protects against forced entry - patented solution
- IP59K - Complete dust and water resistance


- Strong 100% metal for long-term and heavy-use - no plastic components
- Large, clear combination digits, double the size of any competitors (5mm tall), that don't fade
- Sufficient digit and dial spacing that prevents accidental lockouts
- Strongest latch (cam) in the industry and cannot be forced unlocked
- Cam latch type (standard offsets: 25mm, 32mm, and 39mm - addtl available)
- Simple 2 screw installation
- Recessed mounted
- Accommodates doors 1-32mm thickness
- Ergonomic non-slip grip

- One step twist-&-pull operation
- Knob rotates 90 degrees (from 12 o'clock to 3 o'clock) on left and right hand locks
- Latch is simply interchangeable to left or right
- Clear locked and unlocked status indicator is visible from a distance
- When disinfecting, mist with liquid that is at least 70% alcohol solution in order to maintain product integrity
- **Immediate live response during business hours - no run around**
(sos@keyless.co or 972.331.2770)


FRONT VIEW

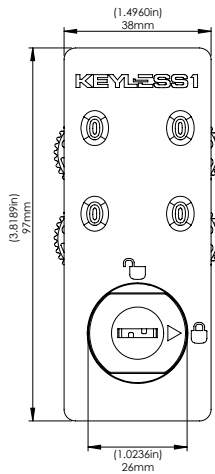

TOP VIEW

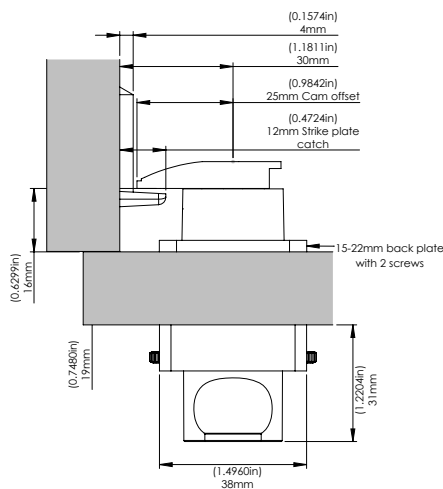


DOOR ROUTING

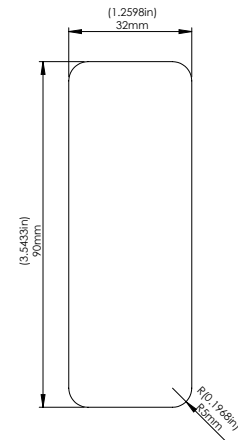

2010 & 2012 ADA STANDARDS FOR ACCESSIBLE DESIGN REQUIREMENTS



- 5% of lockers and their operable parts, the locks, must meet ADA specifications.
- Locks shall be operable with one hand.
- Shall not require tight grasping, pinching, or twisting of the wrist to operate.
- Shall have a force required to activate of 5lbs (22.2N) maximum.
- Locks shall be installed maximum 48.00"/1220mm from the floor surface.





- 1 Highest touch point
- 2 Front Edge of block
- 3 Top of finished floor

KEYLESS1

INSTRUCTIONS

USER INSTRUCTIONS



TO LOCK

1. Close the door.
2. Make sure knob is pointing up to , then set any 4-digit code.
3. Turn knob to .
4. Scramble the dials.

CLICK LINK:

<https://www.keyless.co/keyless1/instructions/user/>

TO UNLOCK

1. Re-enter your code.
2. Turn the knob up to .
3. Open the door.
4. Keeping the knob facing , scramble the dials for the next user.





**SCAN QR CODE
TO VIEW USER
INSTRUCTION VIDEO:**



MANAGER INSTRUCTIONS

MASTER KEY CODE BYPASS





(immediate manager access without code obstruction)

1. Insert the Master Key pointing towards the .
2. Turn the knob to  and access the locker, then close the door while keeping the knob facing .
3. Return the knob to the  position, and remove the key.

**Locker will remain locked and code will remain the same.*

USER CODE RETRIEVAL & RESET

(retrieve forgotten user code and reset code for new user)

1. Insert the Master Key pointing towards the  and turn the knob to .
2. With each dial: spin until it stops.
 - After setting each dial, the last used code will display.
3. Turn the knob back to  and remove the key.
 - Then, return the knob to  and scramble the dials for the next user.

CLICK LINK:

<https://www.keyless.co/keyless1/instructions/reset/>

**SCAN QR CODE TO VIEW
CODE RETRIEVAL & RESET
INSTRUCTION VIDEO:**

